
MOLEAD | CLING

LIMITED SPACE
INFINITE CARE

LEZDS-06-J

Low Temperature Heat Pump Electric Air Conditioner

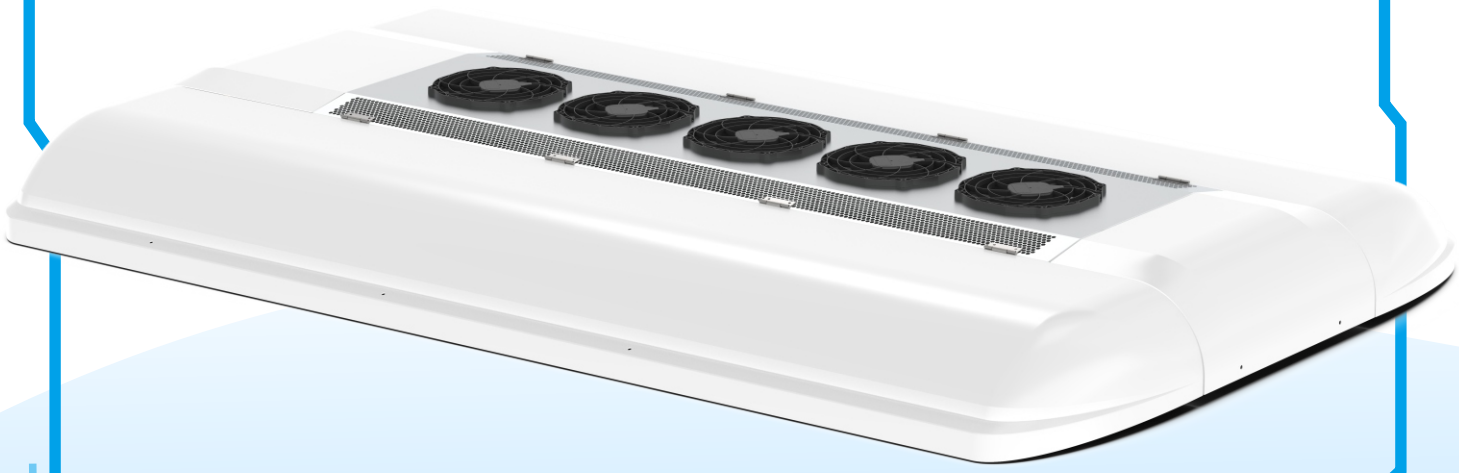

Energy Saving

Safety

Light Weight

Comfortable

Recyclable

Intelligent

www.clingac.com

marketing@clingac.com

+86 371 8533 5504

Zhengzhou, Henan ,China

LEZDS-06-J




Technical Data

Cooling Capacity(kcal/h)	32000
Heating Capacity(kcal/h)	30000
Battery Cooling Capacity Driving/Charging (kW)	5/8
Evaporator Airflow(m^3/h)	6000(6Pcs)
Condenser Airflow(m^3/h)	10000(5Pcs)
Refrigerant	R410A
Weight(kg)	315
Size(mm) L*W*H	3250*2000*260
Application(M)	10-12

- It is capable of normal and stable operation at ambient temperature of -15℃~50℃.
- The low temperature heat pump increases the heating capacity of the system under operating condition at low temperature and reduces power consumption by more than 50% compared with PTC.
- Pressure sensor coupled electronic expansion valve realizes the precise control of system refrigerant, natural temperature transition, energy saving and comfort.
- Remote and real-time monitoring of product operating status reduces the management cost.

IATF 16949 · EMC Grade III · E-MARK

Drawing

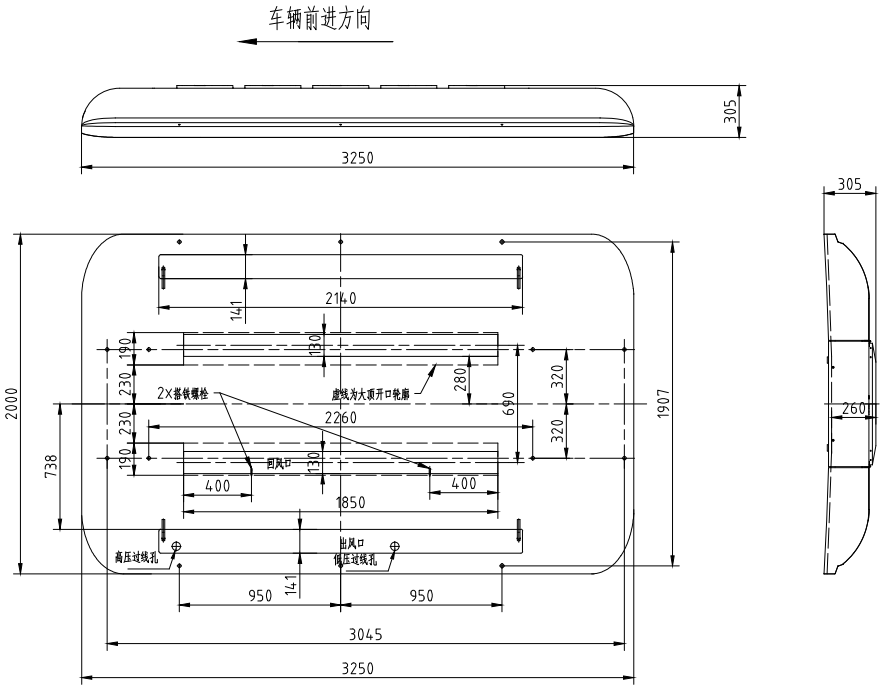

Van · City Bus · Intercity Bus · Coach · School Bus